


5 Flange

One Piece Flange


Flange (ANSI) - Socket (ASTM)

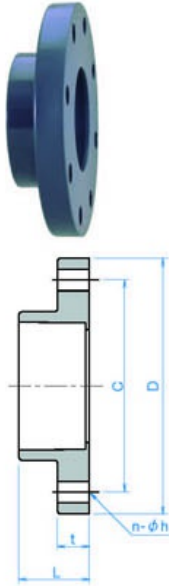

Size	mm						Weight (kg/pc)	
	L	t	C	D	n	h	PVC	CPVC
1/2"	25.0	11.5	60.5	89.0	4	15.7	0.100	0.105
3/4"	29.5	13.0	70.0	98.8	4	15.7	0.140	0.134
1"	32.0	14.5	79.5	108.3	4	15.7	0.191	0.190
1-1/4"	38.5	17.6	89.0	118.8	4	15.7	0.255	0.240
1-1/2"	40.5	19.0	98.5	127.5	4	15.7	0.318	0.360
2"	46.6	19.5	120.5	152.0	4	19.1	0.458	0.512
2-1/2"	51.0	22.5	139.5	177.0	4	19.1	0.749	0.799
3"	55.0	27.1	152.5	192.8	4	19.1	0.880	0.983
4"	64.0	29.3	190.5	229.7	8	19.1	1.340	1.497
5"	82.0	28.0	216.0	254.0	8	22.4	1.648	1.841
6"	84.5	25.5	241.5	279.0	8	22.4	1.912	1.944
8"	116.0	29.0	298.5	343.0	8	22.4	3.400	3.798

NOTE: Flange bolt hole patterns meet ANSI B16.5, class 150

Flange (JIS) - Socket (ASTM)

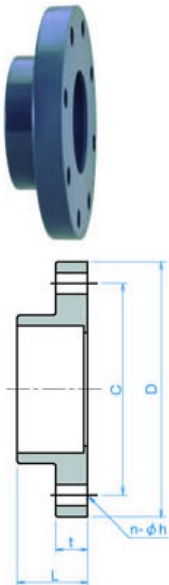


Size	mm						Weight (kg/pc)	
	L	t	C	D	n	h	PVC	CPVC
1/2"	25.0	14.0	70	95	4	15	0.130	0.150
3/4"	29.5	14.0	75	100	4	15	0.140	0.165
1"	32.0	14.0	90	125	4	19	0.240	0.265
1-1/4"	38.5	16.0	100	135	4	19	0.327	0.304
1-1/2"	40.5	16.0	105	140	4	19	0.320	0.358
2"	45.0	20.0	120	155	4	19	0.473	0.528
2-1/2"	51.0	22.0	140	175	4	19	0.664	1.585
3"	55.0	22.0	150	185	8	19	0.700	0.752
4"	64.0	22.0	175	210	8	19	0.900	0.984
5"	82.0	24.0	210	250	8	23	1.410	1.508
6"	84.5	25.5	240	280	8	23	1.800	1.956
8"	116.0	28.0	290	330	12	23	2.900	3.358

NOTE: Flange bolt hole patterns meet JIS B2220

5 Flange

Van Stone Flange

Flange (JIS) - Socket (ASTM)

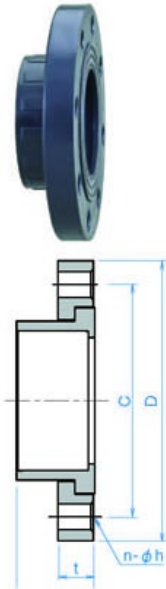


Size	mm						Weight (kg/pc)	
	L	t	C	D	n	h	PVC	CPVC
2"	43.0	20.0	120.0	153.0	4	20.0	0.415	0.446
2-1/2"	51.0	24.5	140.0	178.3	4	20.0	0.630	0.683
3"	55.0	27.0	150.0	185.0	8	19.0	0.775	0.770
4"	64.0	28.0	175.0	210.0	8	19.0	0.930	0.990
5"	82.0	28.0	210.0	250.0	8	23.0	1.365	1.657
6"	85.0	32.0	240.0	283.4	8	23.0	1.930	2.124
8"	120.5	36.0	290.0	330.0	12	23.0	3.040	3.927
10"	150.0	42.0	355.0	400.0	12	25.0	4.923	5.686
14"	203.0	14.0	445.0	490.0	16	25.0	12.670	13.365
16"	225.0	14.0	510.0	560.0	16	27.0	17.990	18.850
18"	248.0	14.0	565.0	620.0	20	27.0	23.170	25.277
20"	280.0	15.0	620.0	675.0	20	27.0	34.300	36.103
24"	344.0	15.0	730.0	795.0	24	33.0	59.350	60.723

NOTE: Flange bolt hole patterns meet JIS B2220

Blind Flange

Flange (ANSI)



Size	mm					Weight (kg/pc)	
	t	C	D	n	h	PVC	CPVC
1/2"	12	60.5	89	4	16	0.108	0.100
3/4"	13	70.0	98	4	16	0.148	0.132
1"	15	79.5	108	4	16	0.176	0.190
1-1/4"	16	89.0	117	4	16	0.290	0.238
1-1/2"	18	98.5	127	4	16	0.295	0.329
2"	18	120.5	152	4	19	0.463	0.518
2-1/2"	22	139.5	178	4	19	0.840	0.843
3"	24	152.5	191	4	19	0.928	1.145
4"	24	190.5	229	8	19	1.501	1.262
5"	26	216.0	254	8	22	1.746	1.950
6"	26	241.5	282	8	22	2.229	2.489
8"	28	298.5	343	8	22	3.410	3.809
10"	28	362.0	406	12	25	4.842	4.966
12"	28	432.0	483	12	25	7.010	8.810
14"*	45	476.0	535	12	29	14.905	13.560
16"*	45	540.0	595	16	29	16.843	17.930
18"*	45	578.0	635	16	32	17.942	19.735
20"*	45	635.0	700	20	32	21.642	23.803
24"*	45	749.0	815	20	35	28.130	30.940

NOTE: Flange bolt hole patterns meet ANSI B16.5 class 150

*For more than 14", please contact us